

DS-K1T320EX **Value Series Face Access Terminal**




Face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster with higher accuracy. It also supports multiple authentication modes: face/card/PIN authentication, etc. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.

- 2.4-inch LCD screen, 2 MP lens
- Multiple authentication methods, including face, card, PIN etc.
- Supports EM card
- Max. 500 faces, 1,000 cards, and 100,000 events
- Face recognition duration < 0.2 s/User
- Supports ISAPI and ISUP 5.0 protocols
- Configuration via the web client
- Supports Push SDK.
- Supports face duplicate check, preventing multiple people from using the same face.
- Supports attendance-only function.

▪ Specification

Display	
Screen size	2.4 inch
Type	Displayscreen
Video	
Lens	1
Resolution	2 MP (video stream: 720P)
FOV	HFOV = 43°; VFOV = 25°
Network	
Wired network	Support
Interface	
Network interface	1 RJ-45, 10/100 M self-adaptive
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
USB	1
Authentication	
Card type	EM card
General	
Built-in access controller	Support
Power supply	12 VDC
Power consumption	≤6 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	0 to 90% (No condensing)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Brazilian Portuguese, Japanese, Korean, Chinese Traditional, French, Turkish, Kazakh and Uzbek.
Function	
Face anti-spoofing	Support

▪ Dimension

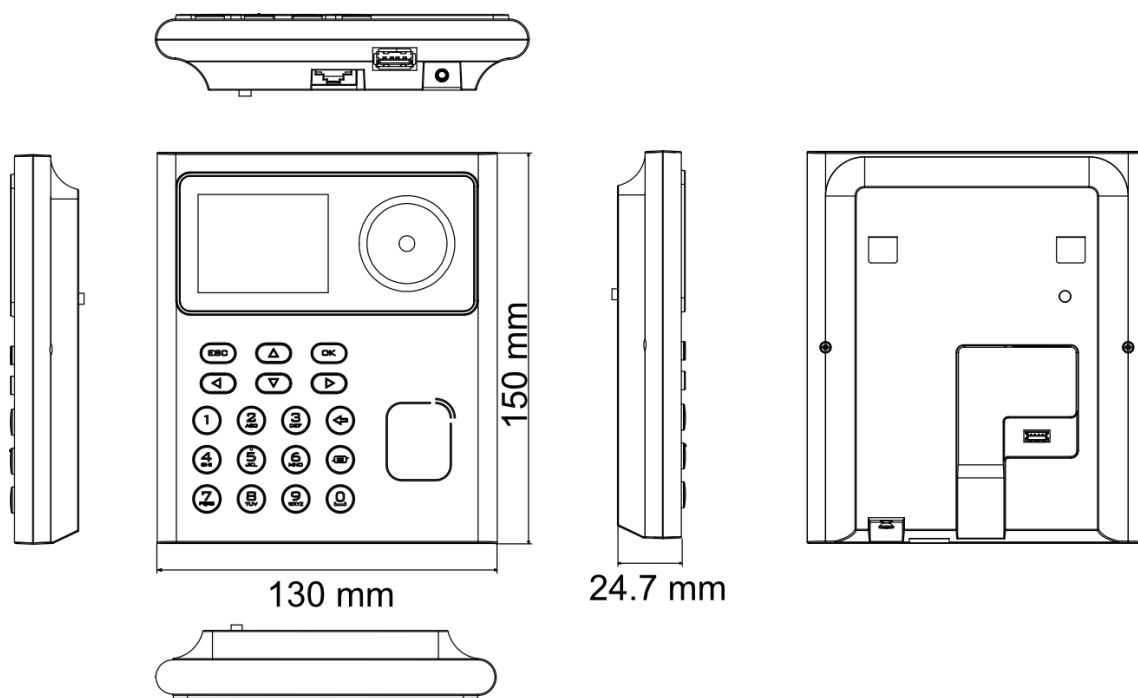

▪ **Accessory**

▪ **Optional**

DS-KAB320-D1	DS-KAB6-W1
	

See Far, Go Further



www.hikvision.com
support@hikvision.com

